


Arctic Cat® ATV

Installation Instructions - Accessory Kit

Passenger Seat Kit

(p/n 1436-028)

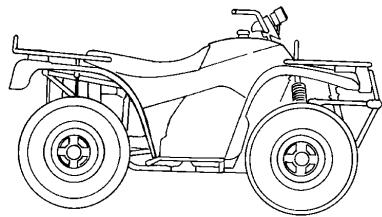

■ NOTE: Read these installation instructions thoroughly before beginning the installation process. Retain these Installation Instructions for future reference.

Application:


2007 700 Diesel

Kit includes:

Ref. No.	p/n	QTY	DESCRIPTION
1506-938	1	1	Seat Assembly
1506-939	1	1	Backrest Assembly
8408-816	4	4	Cap Screw (8 mm)
0453-453	1	1	Instructions

■ NOTE: Mounting hardware can be found in the hardware package.

1. Place the backrest into position (curved portion toward the front) between the supports and install the four cap screws (8 mm) two on each side.

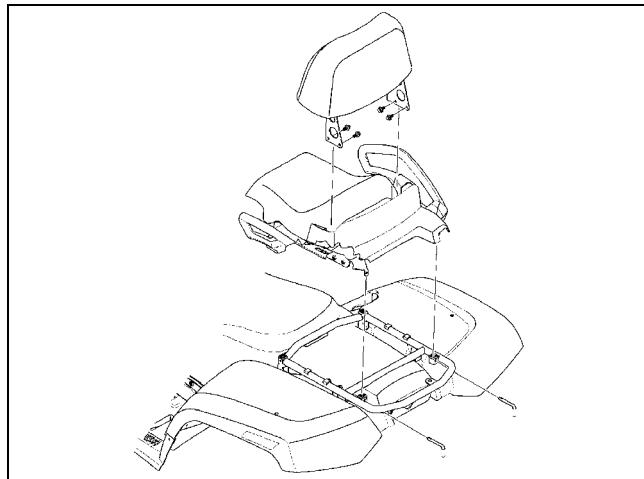

2. Tighten all four cap screws (alternating from side to side) to 5.5 kg-m (40 ft-lb).

3. To install the optional rear seat, remove the rear rack; then engage the two front mounting lugs into the mounting rack. While holding down firmly on the front of the seat, push the seat forward until the rear tabs engage the rear mounting latches.
4. Lock the seat into position by pushing the two latch handles to the front and rotating them to the horizontal position. See Fig. 1.

Fig. 1



WARNING

Make sure the seat is secure before mounting the ATV. Severe personal injury may result if the seat is not properly secured.

5. To remove the rear seat, pull the two latch handles to the rear and rotate them to the vertical position.
6. Lift the rear of the seat up; then pull slightly to the rear and lift the seat off the mountings.

