


Arctic Cat® ATV

Installation Instructions - Accessory Kit

TRV Extended Rear Rack Kit (p/n 1436-230)

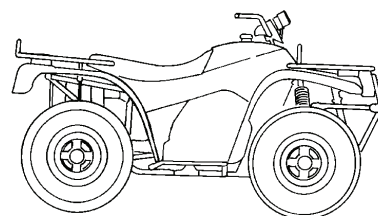

■ **NOTE:** Read these Installation Instructions thoroughly before beginning the installation process. Retain these Installation Instructions for future reference.


Application: 2006-2009 TRV Models

Kit includes:

p/n	QTY	DESCRIPTION
2506-598	1	Rear Rack
2406-777	1	Plastic Rack
8410-640	4	Cap Screw (M6 x 40)
8050-223	4	Washer
0423-540	4	Lock Nut
2506-926	1	Flag Bracket
8410-650	3	Cap Screw (M6 x 50)
0453-550	1	Instructions

■ **NOTE:** Make sure to use the proper hardware (M6 x 50 Cap Screw) for the right-side when mounting the plastic rack to the rear rack and through the flag bracket.

Fig. 1

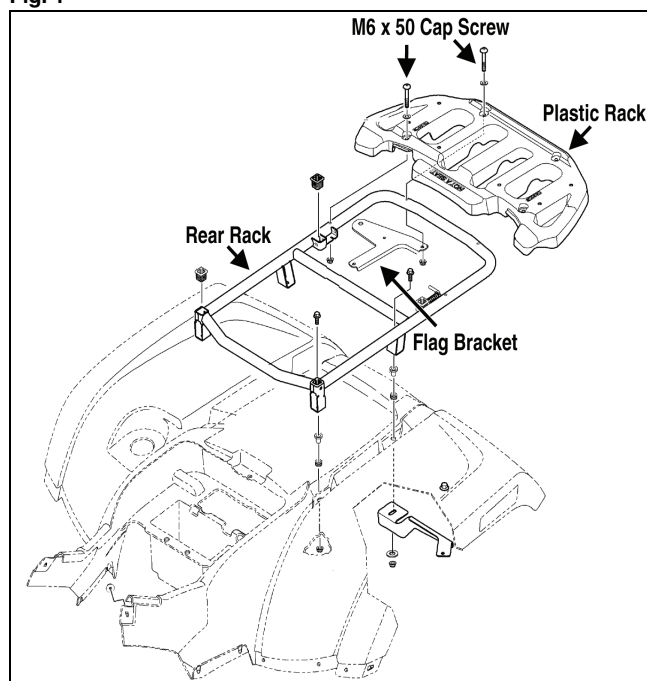

0743-526A

1. Remove the existing passenger seat.
2. Remove the existing mounting rack and retain all mounting hardware.
3. Install new Rear Rack using existing hardware. Tighten to 20 ft.-lb.
4. Install Plastic Rack using two M6 x 40 Cap Screws (left-side), two M6 x 50 Cap Screws (right-side with Flag Bracket), four Washers, and four Lock Nuts. Tighten all hardware to 60 in.-lb. See Fig. 1.

