

Arctic Cat®

Instructions

Fuel Pressure Tester Kit


(p/n 0644-587)

■ **NOTE:** Read these instructions thoroughly and carefully before beginning the this process. Retain these instructions for future reference.

Kit includes:

p/n	QTY	DESCRIPTION
0644-510	1	Fuel Pressure Tester Assembly
1670-878	1	90° Fuel Pump Connector
1653-789	1	Instructions

■ **NOTE:** Refer to the appropriate Arctic Cat Snowmobile/ATV Service Manual for more specific instructions.

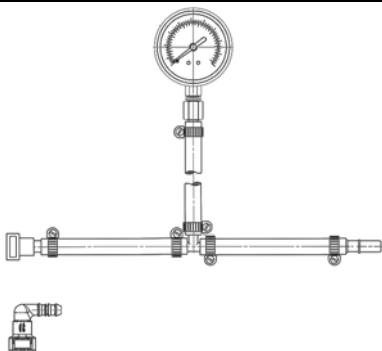

■ **NOTE:** When testing fuel pressure on the Sno Pro 500 models, remove the straight fuel pump connector and install 90° Fuel Pump Connector.

1. Disconnect the fuel hose from the fuel pump assembly and install Fuel Pressure Tester Assembly between the fuel pump and the fuel hose.

CAUTION

When disconnecting the fuel hose connector from the fuel pump assembly, be sure to press in and press down on the connector; then press in the black release button and lift the connector from the fuel pump. Do not force the fuel hose connector as it can be easily damaged.

WARNING

The fuel pump hose is under pressure. Remove the hose slowly to release the fuel pressure. Place an absorbent towel around the connector to absorb fuel.

2. Start the engine and check fuel pressure. Refer to the appropriate Service Manual for the fuel pressure specification.

